



from **\$52**

VAR-SOM-MX6

Design without boundaries

Main Features

Freescal e iMX 6

- High performance with 1.2 GHz Quad Core Cortex-A9™
- Up to 4GB DDR3, 4GB SLC NAND and 64GB eMMC
- Full HD 1080p video encoding/decoding capability
- Vivante GPU providing 2D/3D acceleration

Display Support

- 2 x LVDS, HDMI 1.4, MIPI-DSI
- LCD: WUXGA (1920 x 1200), HDMI: 1080p
- 4-wire resistive touch panel

Networking

- Gigabit Ethernet
- Certified WiFi 802.11 a/b/g/n with MIMO
- Bluetooth: 4.1 + BLE

USB

- USB 2.0 OTG
- USB 2.0 Host

Audio

- Digital audio SSI(AUDMUX)/SPDIF
- Digital microphone (stereo)
- Headphone out, line-in

Camera

- MIPI CSI serial input
- 2 x parallel input

Other Interfaces:

- Dual CAN , I2C, SPI, PWM, JTAG, keypad
- PCIe, S-ATA

-40-85 °C industrial temperature support

OS Support

- Linux: Yocto, Ubuntu
- Android
- WEC 7 and 2013

Power

- Single 3.3V
- Digital I/O 3.3V
- RTC external backup battery

Dimensions (W x L x H):


51.7 mm x 67.8 mm x 4.5 mm

Overview

Supporting the Freescale i.MX 6 1.2 GHz quad/dual/single core Cortex-A9™ processor, the impressive scalability of the VAR-SOM-MX6 satisfies the needs of the most demanding future application requirements.

This high performance System on Module, allows customers to create optimized products for target markets without the need for lengthy and costly redesign cycles.

The four CPU assembly options can accommodate broader connectivity, faster processing power, enhanced algorithms or improved graphics and video performance to name a few.

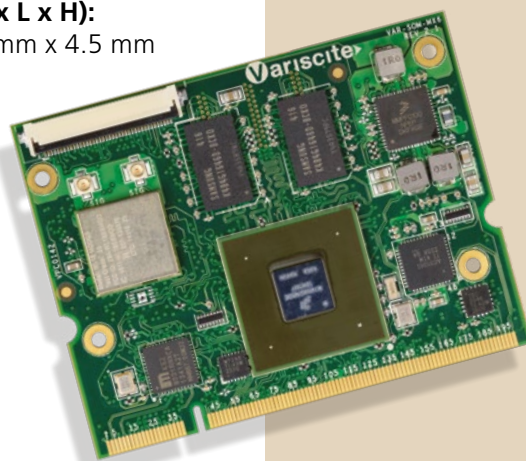

Complementing the VAR-SOM-MX6

VAR-DVK-MX6 Evaluation Kit



Overview

The VAR-DVK-MX6 allows full performance and capability evaluation, serving as a development and evaluation platform for hardware and software teams.

- VAR-MX6CustomBoard populated with VAR-SOM-MX6
- Two display options:
 - 7" LCD + resistive touch panel;
 - 7" LCD + capacitive touch panel
- Power supply and communication cables
- Documentation and design package

VAR-MX6CustomBoard



Overview

VAR-MX6CustomBoard - Supporting VAR-SOM-MX6

The VAR-MX6CustomBoard not only ensures scalable and simplified development to achieve a short-time to market for current innovations, but also accommodates potential R&D directions and marketing opportunities.

Display Support

- 4-pair 24-bit LVDS header
- 18-bit RGB parallel

Touch Panel

- 44-wire resistive touch panel (4-pin FFV/FPC)
- Capacitive touch support (10-pin FFV/FPC)

Audio

- Headphone
- Line-in
- Digital microphone

USB

- 3 x USB 2.0 host
- 1 x USB OTG

Ethernet

- Gigabit Ethernet

Storage

- SD/MMC card socket
- SATA 22-pin (7+15)

Serial Interfaces

- PCIe
- Mini PCIe Socket+ SIM
- DB-9 male (DTE)
- IDC 10 header (Debug)
- RS485 (Header)

Expansion Connectors

- SPI, I2C, UART
- CAN Bus
- EMI (Local Bus Interface)
- SD/MMC interface
- Parallel Camera Interface
- Serial Camera Interface (MIPI CSI)
- Serial Display Interface (MIPI DSI)
- Backlight driver

Power

- 7.5V -14V DC Input

About Variscite

Variscite is a leading System on Modules (SoM) and Single-Board-Computer (SBC) design and manufacture company. A trusted provider of development and consulting services for a variety of embedded platforms, Variscite transforms clients' visions into successful products.

For more information contact:
sales@variscite.com


www.variscite.com