



## VAR-SOM-SOLO/DUAL

### Main Features

#### Freescale i.MX6

- High performance 1.0 GHz Single and Dual Core Cortex-A9™
- Up to 1GB DDR3, 1GB SLC NAND and 64GB eMMC
- Full HD 1080p video encoding/decoding capability
- Vivante GPU providing 2D/3D acceleration

#### Display Support

- 2 x LVDS, HDMI 1.4, MIPI-DSI
- LCD: WUXGA (1920 x 1200), HDMI: 1080p
- 4-wire resistive touch panel

#### Networking

- Gigabit Ethernet
- Certified Wi-Fi 802.11 a/b/g/n with MIMO
- Bluetooth: 4.0 + BLE

#### USB

- USB 2.0 OTG
- USB 2.0 Host

#### Audio

- Digital audio SSI(AUDMUX)/SPDIF
- Digital microphone (stereo)
- Headphone out, line-in

#### Camera

- MIPI CSI serial input
- 2 x parallel input

#### Other Interfaces:

- Dual CAN , I2C, SPI, PWM, JTAG, keypad
- PCIe, JTAG

#### -40-85 °C industrial temperature support

#### OS Support

- Linux: Yocto
- Android

#### Power

- Single 3.3V
- Digital I/O 3.3V
- RTC external backup battery

#### Dimensions (W x L x H):

33 mm x 67.8 mm x 4.5 mm


### Overview

Staying on-trend with the market's shift towards a cost-effective highly integrated off-the-shelf solution, the VAR-SOM-SOLO/DUAL from Variscite levels the playing ground for a broad spectrum of embedded products.

Bringing all the benefits of the widely successful VAR-SOM-MX6, the VAR-SOM-SOLO/DUAL from Variscite carries much smaller dimensions and a slim lined price-point.

Features include Freescale's i.MX6 1GHz single and dual Cortex-A9, SLC NAND, eMMC, dual band Wi-Fi/BT with MIMO, USB, Gigabit Ethernet, A/V interfaces and industrial operating temperatures.

The VAR-SOLOCustomBoard completes an attractive full reference kit which can be used for customers evaluation, development and mass production.

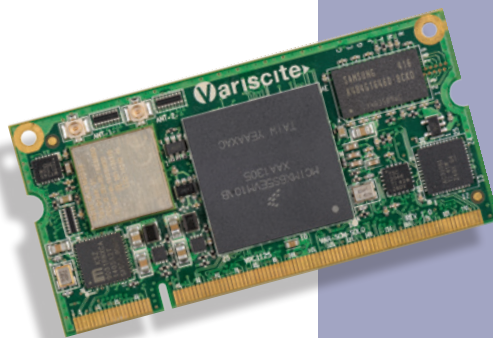

# Complementing the VAR-SOM-SOLO/DUAL

## VAR-DVK-SOLO/DUAL Evaluation Kit




### Overview

The VAR-DVK-SOLO/DUAL allows full performance and capability evaluation, serving as a development and an evaluation platform for hardware and software teams.

- VAR-SOLOCustomBoard populated with VAR-SOM-SOLO/DUAL
- 7" LCD + capacitive touch panel
- Power supply and communication cables
- Documentation and design package

## VAR-SOLOCustomBoard



### Overview

#### VAR-SOLOCustomBoard - Supporting VAR-SOM-SOLO/DUAL

The VAR-SOLOCustomBoard ensures scalable and simplified development to achieve a short-time to market for current innovations. Moreover, it can be used as a carrier board for mass production of customers' end-products.

#### Display Support

- 4-pair 24-bit LVDS header
- 3-pair 18-bit LVDS header
- HDMI 1.4

#### Touch Panel

- 4-wire resistive touch panel (4-pin FFC/FPC)
- Capacitive touch support (6-pin FFC/FPC)

#### Audio/Video

- Serial camera (MIPI CSI)
- Parallel camera (header)
- Headphone
- Line-in
- Digital microphone

#### USB

- 1 x USB 2.0 host
- 1 x USB OTG

#### Ethernet

- Gigabit Ethernet

#### Storage

- SD/MMC card socket

#### Debug

- Micro USB
- JTAG (header)

#### Additional expansion Connectors

- SPI, I2C
- CAN Bus
- UART, RS232
- Digital microphone
- PWM

#### RTC backup battery

- CR1225 coin battery socket

#### Power

- 5V DC input

#### Size

- 8.7cm x 11.7cm

## About Variscite

In less than a decade Variscite has taken a leading position in the System on Modules (SoM) design and manufacture market. A trusted provider of development and consulting services for a variety of embedded platforms, Variscite transforms clients' visions into successful products.

For more information contact:  
[sales@variscite.com](mailto:sales@variscite.com)

  
[www.variscite.com](http://www.variscite.com)