


# DART-MX6

The Smallest i.MX6 SoM in the Embedded Market

from \$67

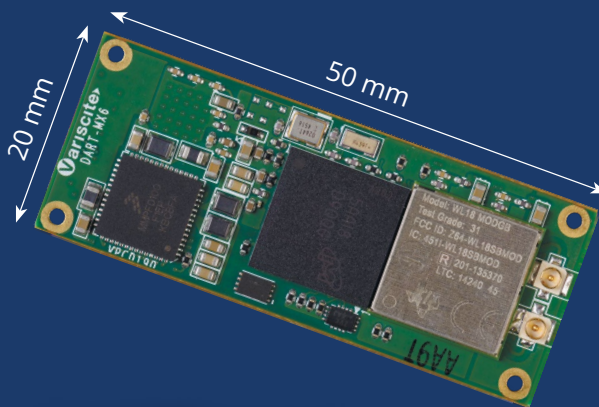

Measuring only 20mm x 50mm, the DART-MX6 is the smallest SoM supporting NXP's i.MX6 quad and dual core Cortex-A9 processor.

The DART-MX6 offers impressive performance and scalability alongside optimized power consumption and miniature size thus making it ideal for portable and battery operated embedded systems.

The DART-MX6 highly integrated connectivity includes dual band Wi-Fi/BT with MIMO, dual USB, Gigabit

Ethernet, PCIe and A/V interfaces all supported in -35 to 85 °C industrial operating temperatures.

The VAR-DT6CustomBoard carrier board of the DART-MX6 completes an attractive full reference kit which can be used for customers evaluation, development and mass production.

## Main Features

### NXP i.MX6

- High performance 800 MHz Quad Core Cortex-A9  
Up to 1GB LP-DDR2, 64GB eMMC
- Full HD 1080p video encoding/decoding capability
- Vivante GPU providing 2D/3D acceleration

### Display Support

- 2 x LVDS, HDMI 1.4, MIPI-DSI
- LCD: WUXGA (1920 x 1200), HDMI: 1080p

### Networking

- Gigabit Ethernet
- Certified Wi-Fi 802.11 a/b/g/n with MIMO
- Bluetooth: 4.1 + BLE
- PCIe

### USB

- USB 2.0 OTG
- USB 2.0 Host

### Audio

- Digital audio SSI(AUDMUX)/SPDIF
- Digital microphone (stereo)
- Headphone out, line-in

### Camera

- MIPI CSI serial input
- Parallel input

### Other Interfaces:

- Dual CAN, I2C, SPI, PWM, JTAG, UART, SD/MMC

### OS Support

- Linux
- Android

### Power

- Single 3.7V

### Dimensions (W x L x H)

- 20mm x 50mm x 4mm

### -40 to 85°C Industrial temperature range

### Low Power consumption:

- Only 8mA in suspend mode

# Complementing the DART-MX6

## VAR-DVK-DT6 Evaluation Kit

The VAR-DVK-DT6 allows full performance and capability evaluation, serving as a development and evaluation platform for hardware and software teams.

### Evaluation Kit content


- VAR-DT6CustomBoard populated with DART-MX6
- 7" LCD + capacitive touch panel
- Power supply and communication cables
- Documentation and design package



## VAR-DT6CustomBoard

### VAR-DT6CustomBoard - Supporting DART-MX6

The VAR-DT6CustomBoard not only ensures scalable and simplified development to achieve a short-time to market for current innovations, but also accommodates potential R&D directions and marketing opportunities.

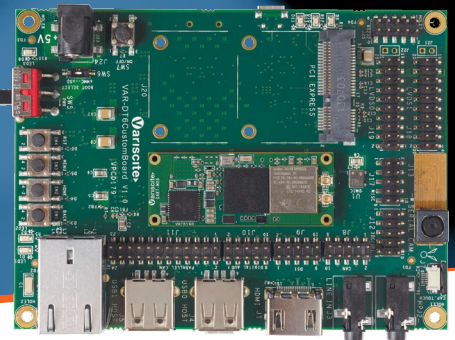

### Display Support

- Dual 18/24-bit LVDS headers
- DSI
- HDMI 1.4

### Touch Panel

- Capacitive touch support (6-pin FFC/FPC)

### Audio/Video

- Serial camera (MIPI CSI)
- Parallel camera (header)
- Headphone
- Line-in
- Digital microphone

### USB

- 1 x USB 2.0 host
- 1 x USB OTG

### Ethernet

- Gigabit Ethernet

### PCIe

### Storage

- SD/MMC card socket

### Debug

- Micro USB
- JTAG (header)

### Additional expansion Connectors

- SPI, I2C
- CAN Bus
- UART, RS232
- Digital microphone
- PWM

### RTC backup battery

- CR1225 coin battery socket

### Power

- 5V DC input

### Size

- 8.7cm x 11.7cm

## About Variscite

Variscite is a leading System on Modules (SoM) and Single-Board-Computer (SBC) design and manufacture company. A trusted provider of development and consulting services for a variety of embedded platforms, Variscite transforms clients' visions into successful products.

For more information contact:

[sales@variscite.com](mailto:sales@variscite.com)

Copyright ©2017 Variscite. All rights reserved. Variscite Ltd. logos and product names are registered trademarks of Variscite Ltd. No part of this document may be reproduced by any means, nor translated to any electronic medium without the written consent of Variscite. Information contained in this document is believed to be accurate and reliable; however, Variscite assumes no responsibility for its use. Specifications are subject to change without notice.

