


# DART-6UL

Optimizing Power, Size and Cost

from \$24

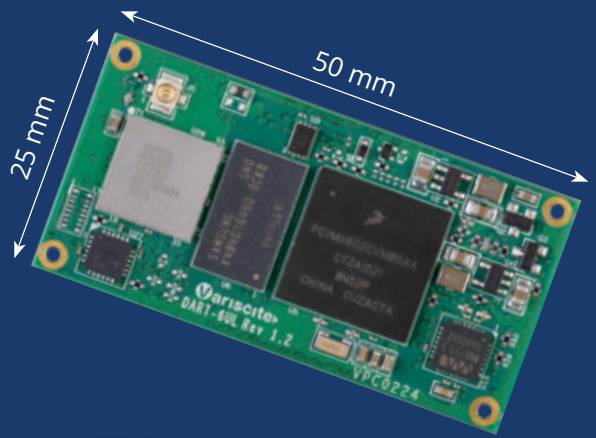

The DART-6UL, measuring only 25mm x 50mm, is a highly flexible System-on-Module (SoM) based on NXP's i.MX 6UltraLite / 6ULL / 6ULZ family and carries up to 900MHz ARM Cortex-A7 processor.

A versatile platform, the DART-6UL provides a variety of interfaces and connectivity options -all packaged at an optimized power, size and cost. This superior price/performance offering is ideal for fast emerging applications such as Internet-of-Things (IoT), as well as other portable and battery operated embedded systems.

The DART-6UL highly integrated connectivity includes a certified WiFi, Bluetooth/BLE, dual Ethernet, dual USB, audio, display with touch panel and serial interfaces. In addition, the system supports industrial operating grade, targeting embedded application requiring a wide temperature range.

The VAR-6ULCustomBoard carrier board complements an attractive full reference kit of the DART-6UL, which can be used for customers' evaluation, development and end-product mass production.

## Main Features

### NXP i.MX 6UltraLite / 6ULL / 6ULZ

- Power optimized up to 900MHz, ARM Cortex-A7
- 1GB DDR3L, 512MB NAND / 64GB eMMC
- Integrated security features
- 2D pixel acceleration engine (PxP)

### Display Support

- 24bits Parallel LCD up to WXGA (1366 x 768)
- Touch screen controller

### Networking

- 2x 10/100Mbps Ethernet
- Certified WiFi 802.11ac/a/b/g/n and Bluetooth 4.2/BLE

### USB

- USB 2.0 OTG
- USB 2.0 Host

### Audio

- Digital audio SSI(AUDMUX)/SPDIF
- Analog microphone (stereo)
- Headphone out, Line-in
- ESAI (6ULL only)

### Camera

- Parallel input

### Other Interfaces

- Dual CAN, I2C, SPI, PWM, JTAG, UART, SD/MMC

### OS Support

- Linux

### Power

- Single 3.3V

### Dimensions (W x L xH):

- 25mm x 50mm x 4mm

### -40 to 85°C Industrial temperature range

### Low Power consumption

- Optimized power consumption in both operational and suspend modes



# Complementing the DART-6UL

## DART-6UL Evaluation Kit

The VAR-DVK-6UL allows full performance and capability evaluation, serving as an evaluation, development and production platform for hardware and software teams.

### Evaluation Kit content

- VAR-6ULCustomBoard populated with DART-6UL
- 7" LCD + capacitive touch panel
- Power supply and communication cables
- Documentation and design package



## VAR-6ULCustomBoard

### VAR-6ULCustomBoard - Supporting DART-6UL

The VAR-6ULCustomBoard ensures a scalable and simplified development and reference board to achieve a short time-to-market for customer's designs and end-products.



### Display Support

- 24-bit RGB
- 18-bit LVDS

### Touch Panel

- Capacitive touch support (6-pin FFC/FPC)
- Resistive touch support (via header)

### Audio

- Headphone
- Line-in

### USB

- 2 x USB 2.0 host
- Optional 1 x USB OTG

### Ethernet

- 2 x 10/100Mbps Ethernet RJ45

### Storage

- SD/MMC card socket

### Additional expansion Connectors

- SPI, I2C
- CAN Bus
- UART, RS232
- Digital Audio
- PWM

### Debug

- Micro USB
- JTAG (header)

### RTC backup battery

- CR1225 coin battery socket

### Power

- 5V DC input

### Size

- 7cm x 10cm

## About Variscite

Variscite is a leading System on Modules (SoM) and Single-Board-Computer (SBC) design and manufacture company. A trusted provider of development and consulting services for a variety of embedded platforms, Variscite transforms clients' visions into successful products.

For more information contact:

[sales@variscite.com](mailto:sales@variscite.com)

Copyright ©2019 Variscite. All rights reserved. Variscite Ltd. logos and product names are registered trademarks of Variscite Ltd. No part of this document may be reproduced by any means, nor translated to any electronic medium without the written consent of Variscite. Information contained in this document is believed to be accurate and reliable; however, Variscite assumes no responsibility for its use. Specifications are subject to change without notice.

