


DART-SD410

Bringing the Snapdragon™ Magic to the Embedded Market

from \$57

Bringing the Snapdragon™ magic to the embedded market, the DART-SD410 supports the Qualcomm® Snapdragon™ 410 (APQ8016) 1.2GHz quad ARM Cortex-A53 with both 32-bit and 64-bit architecture.

In an amazing 25mm x 43mm ultra compact size, the DART-SD410 offers a staggering processing power and highly optimized power consumption, ideal for embedded portable devices and battery-operated products.

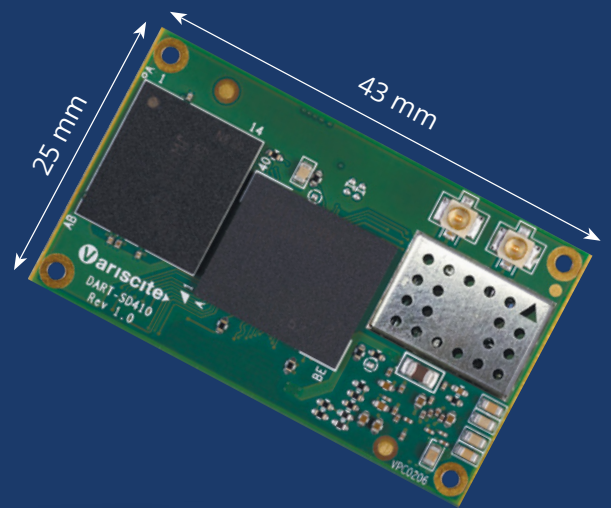

High-resolution camera, advanced multimedia support and broad connectivity options are just some of the features that ensure a richer experience in various embedded segments and applications.

Main Features

Qualcomm® Snapdragon™ 410 (APQ8016)

- 1.2GHz quad ARM® Cortex® A53 64/32-bit processor
- 400MHz Qualcomm® Adreno™ 306 2D/3D Graphics accelerator
- 1080p30 encode/decode
- Up to 2GB LP-DDR3 and 16GB eMMC

Display Support

- 4-lane DSI
- HDMI and LVDS supported on carrier
- Up to 720p60/1080p30, 24-bit

Wireless Connectivity

- Wi-Fi 802.11b/g/n
- Bluetooth: 4.1/LE backward compatible to 2.x+EDR and 3.0
- FM radio

GPS

- Qualcomm® IZat™ Gen 8C location engine
- GPS, Compass and Glonass/Galileo

USB

- 1 x USB2.0 Host/Device

Ethernet

- Gigabit Ethernet through USB bridge on carrier

Camera

- 2 x MIPI CSI, 4-lane up to 13MP and 2-lane up to 8MP

Audio

- Digital microphone
- 2 x analog microphone
- Stereo headphone
- Mono speaker
- 2 x I2S

Other Interfaces

- Up to 6 x SPI, 6 x I2C, 2 x UART, GPIOs
- SD/MMC, JTAG
- Backlight PWM

OS Support

- Android, Linux, Windows 10

Power

- Power in 3.7 - 4.5V

-25 to 85°C Temperature range

Dimensions (W x L x H)

- 25mm x 43mm x 4mm

Qualcomm Snapdragon and Qualcomm Adreno are products of Qualcomm Technologies, Inc. Qualcomm IZat is a product of Qualcomm Atheros, Inc.




Complementing the DART-SD410

VAR-DVK-SD410 Evaluation Kit

The VAR-DVK-SD410 allows the customer to fully evaluate the DART-SD410 hardware & software capabilities, serving as a complete development platform as well as a reference design for the customer's specific end-product.

Evaluation Kit content


- DART-SD410
- Carrier board
- 7" LCD + capacitive touch panel
- Power supply and communication cables
- Documentation and design package
- Optional camera extension board

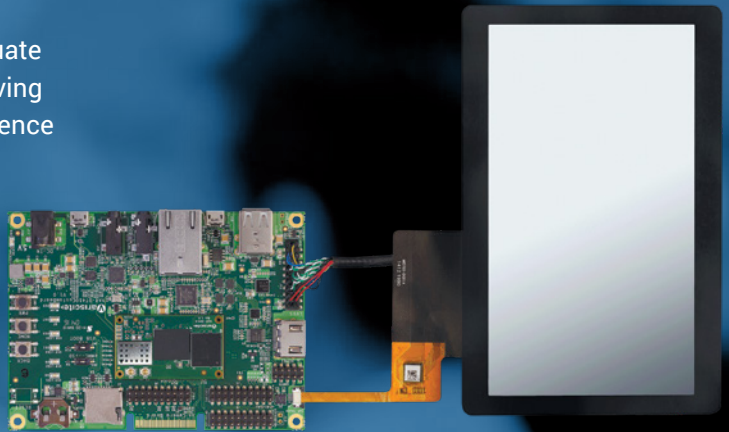

VAR-SD410CustomBoard

VAR-SD410CustomBoard - Supporting DART-SD410

The VAR-SD410CustomBoard not only ensures scalable and simplified development to achieve a short-time to market for current innovations, but also accommodates potential R&D directions and marketing opportunities.

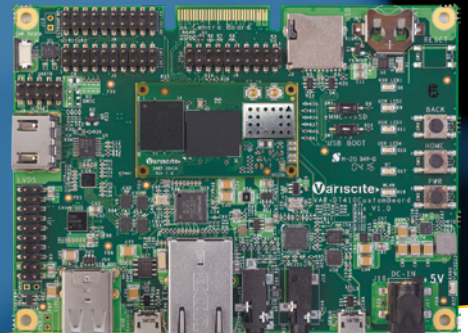

Display support

- 4-pair 24-bit LVDS
- HDMI 1.3
- 4-lane DSI

Capacitive Touch Panel

- 6-Pin FFC/FPC

Camera

- Extension camera connector to support dual camera MIPI-CSI input

Ethernet

- Gigabit Ethernet

Audio

- Mono speaker header
- On board digital microphone
- Headset (microphone plus headphone)
- I2S on expansion header
- Analog microphone

USB

- 2 x USB 2.0 host
- 1 x USB client (muxed with USB Host and ETH)
- 1 x micro USB debug port

Storage

- SD/MMC interface

Additional Connectors

- 4 x I2C, 2 x SPI, UART, GPIO
- JTAG

Battery

- 3V Lithium backup battery

Power

- 5V DC Input

Size

- 87mm x 118mm x 20mm

About Variscite

Variscite is a leading System on Modules (SoM) and Single-Board-Computer (SBC) design and manufacture company. A trusted provider of development and consulting services for a variety of embedded platforms, Variscite transforms clients' visions into successful products.

For more information contact:

sales@variscite.com

Copyright ©2017 Variscite. All rights reserved. Variscite Ltd. logos and product names are registered trademarks of Variscite Ltd. No part of this document may be reproduced by any means, nor translated to any electronic medium without the written consent of Variscite. Information contained in this document is believed to be accurate and reliable; however, Variscite assumes no responsibility for its use. Specifications are subject to change without notice.

