


DART-MX8M

Miniature SoM with ultra-multimedia performance

from \$67

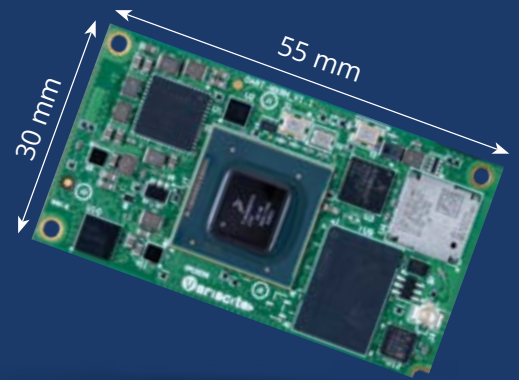

The DART-MX8M offers an ideal solution for embedded systems that require high-end multimedia applications in a small form factor, as well as portable and battery-operated products.

The tiny 30mm x 55mm form SoM is based on NXP i.MX 8M Quad 1.5GHz ARM Cortex-A53 plus 266MHz Real-time Cortex-M4 co-processor. The high multimedia performance spec encompasses UltraHD 4K video HEVC/H265/H264/VP9 decode with HDR, high-quality audio, UltraHD 4K display, HD 2D/3D graphics

acceleration and camera inputs. The DART-MX8M includes a variety of interfaces and connectivity options: Certified dual-band Wi-Fi 802.11ac/a/b/g/n, BT/ BLE, GbE, dual USB3, dual PCIe, SPI and UART.

The VAR-DT8MCustomBoard carrier board complements an attractive full reference kit of the DART-MX8M used by Variscite's customers for evaluation, development and mass production.

Main Features

NXP i.MX 8M

- Dual and Quad 1.5GHz ARM Cortex-A53
- Real-time 266MHz Cortex-M4 co-processor
- Neon Media Processor Engine (MPE)
- Up to 4GB LPDDR4-3200 memory, up to 64GB eMMC storage

Display and video Support

- UltraHD 4K Display
- 4Kp60 HEVC/H.265 decoder
- MIPI DSI 1920X1080 at 60Hz
- HDMI 2.0a/eDP/DP
- Resistive/capacitive touch screen
- Dual channel LVDS display

Networking

- 10/100/1000Mbps Ethernet
- Certified Wi-Fi 802.11ac/a/b/g/n
- Certified Bluetooth 4.2/BLE

High Speed interfaces

- 2 x PCIe
- 2 x USB 3.0 OTG

Audio

- Digital audio (SAI, SPDIF)
- Analog, digital microphone (stereo)
- Headphone out, line-in

Camera

- Dual MIPI CSI2 serial input

Other Interfaces:

- I2C, QSPI/SPI, PWM, JTAG, UART, SD/MMC, GPIO, timers

OS Support

- Linux
- Android

Power

- Single 3.35-4.5V

Dimensions (W x L x H):

- 30.0 mm x 55.0 mm x 4.5 mm

-40 to 85°C industrial temperature support

Low Power consumption:

- Optimized power consumption in both operational and suspend modes



Complementing the DART-MX8M

DART-MX8M Evaluation Kit

The VAR-DVK-MX8M allows full performance and capability evaluation, serving as an evaluation, development and production platform for hardware and software teams.

Evaluation Kit content

- VAR-DT8MCustomBoard populated with DART-MX8M
- 7" LCD + capacitive touch panel
- Power supply and communication cables
- Documentation and design package



VAR-DT8MCustomBoard

VAR-DT8MCustomBoard - Supporting DART-MX8M

The VAR-DT8MCustomBoard ensures a scalable and simplified development and reference board to achieve a short time-to-market for customer's designs and end-products.



Display Support

- DSI, LVDS display, HDMI, DisplayPort

Touch Panel

- Capacitive touch (6-pin FFC/FPC)
- Resistive touch (4-pin FFC/FPC)

Audio

- Headphone
- Line-in
- Digital mic

Storage

- SD/SDIO/MMC card socket
- Optional NAND

High speed interfaces

- 5x USB 3.0/2.0 ports: 1x OTG, 2x HOST, 2x HOST over PCIe interface
- 10/100/1000Mbps Ethernet RJ45
- 2 x mPCIe

Camera

- 2x MIPI CSI serial

Additional expansion Connectors

- SPI, SPDIF, GPIO
- UART, I2C
- PWM
- SAI

Debug

- Micro USB

RTC backup battery

- CR1225 coin battery socket

Power

- 5V DC input

Size

- 15.0cm x 9.0cm

About Variscite

Variscite is a leading System on Modules (SoM) and Single-Board-Computer (SBC) design and manufacture company. A trusted provider of development and consulting services for a variety of embedded platforms, Variscite transforms clients' visions into successful products.

For more information contact:

sales@variscite.com

Copyright ©2018 Variscite. All rights reserved. Variscite Ltd. logos and product names are registered trademarks of Variscite Ltd. No part of this document may be reproduced by any means, nor translated to any electronic medium without the written consent of Variscite. Information contained in this document is believed to be accurate and reliable; however, Variscite assumes no responsibility for its use. Specifications are subject to change without notice.

