


VAR-SOM-MX8X

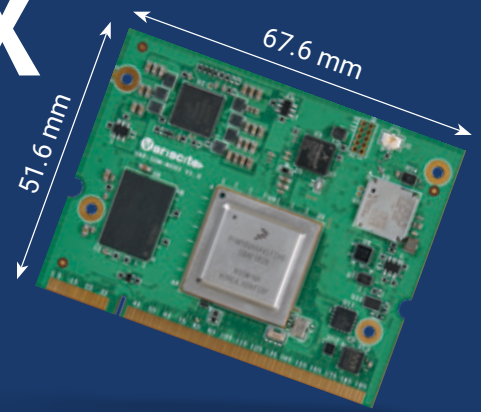

Maximized safety and reliability in a power-optimized design

The VAR-SOM-MX8X supports NXP's i.MX 8X Quad 1.2GHz Cortex™-A35 processor plus Cortex-M4F real-time co-processor and offers built-in safety features, highly integrated multimedia support and efficient power/performance architecture.

VAR-SOM-MX8X is a pin2pin System on Module, compatible with the VAR-SOM-MX8, VAR-SOM-MX6, and VAR-SOM-SOLO/DUAL. It offers Variscite's customers a high level of scalability, extended lifetime availability and reduced development time, cost and risk.

This highly integrated SoM is designed to support a wide range of high-reliability, power-efficient applications, from industrial automation & control to defense, medical, telematics, building control, failover displays/HMI and

robotics. The SoM multimedia features and interfaces options include Vivante GC7000Lite GPU for 2D and 3D graphics acceleration, 4K H.265 Decode, 1080p H.264 Encode/Decode, Camera Interfaces, DSI / LVDS, Parallel LCD, dual GbE, certified Wi-Fi/BT, CAN/CAN-FD, USB3 and serial interfaces.

The Symphony carrier board complements an attractive full reference kit of the VAR-SOM-MX8X, used by Variscite's customers for evaluation, development and mass production.

Main Features

NXP i.MX 8X processor

- 4 x 1.2GHz ARM Cortex™-A35
- Real-time ARM Cortex™-M4F
- Neon Media Processor Engine (MPE)
- Internal HiFi 4 DSP
- GC7000Lite high performance GPU

Memory and Storage:

- Up to 4GB LPDDR4 memory, up to 64GB eMMC storage

Display and video Support

- 24-bit parallel LCD up to 720p60
- 4K H.265 Decode, 1080p H.264 Encode/Decode
- MIPI DSI 1920X1080 at 60Hz
- Touch screen
- Dual channel LVDS display 1920X1080 at 60Hz

Networking

- 2x 10/100/1000Mbps Ethernet
- Certified WiFi 802.11ac/a/b/g/n and Bluetooth 4.2/BLE

High Speed interfaces

- Dual USB 3.0/2.0
- PCIe
- 3x CAN

Audio

- Digital audio (ESAI, SAI, SPDIF)
- Analog, digital microphone (stereo)
- Headphone out, line-in

Camera

- 1x MIPI-CSI2, 1x parallel CSI

Other Interfaces:

- I2C, SPI, PWM, JTAG, UART, SD/MMC, GPIO, timers, keypad, QSPI

OS Support

- Linux
- Android

Power

- Single 3.V

Dimensions (W x L x H):

- 67.6 mm x 51.6 mm x 5.2 mm

-40 to 85°C industrial temperature support

Low Power consumption:

- Optimized power consumption in both operational and suspend modes



Complementing the VAR-SOM-MX8X

VAR-SOM-MX8X Evaluation Kit

The VAR-DVK-MX8X allows full performance and capability evaluation, serving as an evaluation, development and production platform for hardware and software teams.

Evaluation Kit content

- Symphony-Board populated with VAR-SOM-MX8X
- 7" LCD + capacitive touch panel
- Power supply and communication cables
- Documentation and design package

Symphony-Board

Symphony-Board - Supporting VAR-SOM-MX8X

The Symphony-Board ensures a scalable and simplified development and reference board to achieve a short time-to-market for customer's designs and end-products.



Display Support

- DSI, dual LVDS display

Audio

- Headphone
- Line-in
- Digital mic
- High speed interfaces
- 2x USB 3.0/2.0 ports
- 2x 10/100/1000Mbps Ethernet RJ45
- mPCIe

Storage

- SD/SDIO/MMC card socket

Touch Panel

- Capacitive touch (6-pin FFC/FPC)
- Resistive touch (4-pin FFC/FPC)

Camera

- MIPI CSI serial, 1x parallel CSI (extension connector)

Additional expansion Connectors

- SPI, GPIO
- UART, I2C, CAN
- PWM
- SAI

Debug

- Micro USB

RTC backup battery

- CR1225 coin battery socket

Power

- 12V DC input

Size

- 16.9cm x 8.9cm

About Variscite

Variscite is a leading System on Modules (SoM) and Single-Board-Computer (SBC) design and manufacture company. A trusted provider of development and consulting services for a variety of embedded platforms, Variscite transforms clients' visions into successful products.

For more information contact:

sales@variscite.com

Copyright ©2019 Variscite. All rights reserved. Variscite Ltd. logos and product names are registered trademarks of Variscite Ltd. No part of this document may be reproduced by any means, nor translated to any electronic medium without the written consent of Variscite. Information contained in this document is believed to be accurate and reliable; however, Variscite assumes no responsibility for its use. Specifications are subject to change without notice.

