


VAR-SOM-MX8M-PLUS

The new generation of System on Module
with dedicated AI/ML capabilities

from \$58

Based on NXP's i.MX 8M Plus with up to 1.8GHz Quad-core ARM Cortex-A53 Plus 800MHz Cortex-M7 real-time processor, the VAR-SOM-MX8M-PLUS is the first generation of System on Module with dedicated Artificial Intelligence (AI) / Machine Learning (ML) capabilities. The SoM includes an integrated 2.3 TOPS Neural Processing Unit (NPU), an intelligent vision system with Image Signal Processor (ISP), and dual camera interfaces.

VAR-SOM-MX8M-PLUS supports advanced multimedia features along with extensive connectivity options such as H.265 HD video encode/decode, high performance 2D/3D GPU, up to 4K HDMI, Dual LVDS, DSI, certified Wi-Fi 6 802.11 ax/ac/a/b/g/n with optional 802.15.4 and BT/BLE 5.4, dual USB3, dual GbE, dual CAN-FD, and PCIe.

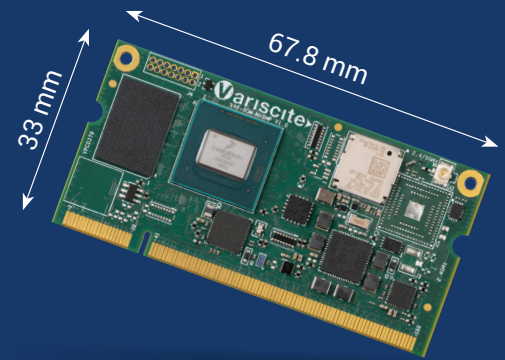

The VAR-SOM-MX8M-PLUS is a member of the VAR-SOM Pin2Pin product family, providing extensive scalability options and reduced development time, costs, and risks. Starting from i.MX 6UL/6ULL modules, through i.MX 6, i.MX 8M Nano, TI AM625x, i.MX 93, i.MX 8M Mini, up to i.MX 8X and i.MX 8QuadMax-based modules.

The Symphony carrier board complements an attractive full reference kit for the VAR-SOM-MX8M-PLUS, used by Variscite's customers for evaluation, development, and mass production.

Main Features

NXP i.MX 8M Plus

- 1.8GHz Quad-core ARM Cortex-A53
- Real-time 800MHz Cortex-M7 co-processor
- Neon Media Processor Engine (MPE)
- AI/ML NPU 2.3 TOPS
- 2D/3D GPU GC7000UL/ GC520L
- Up to 8GB LPDDR4 memory, up to 128GB eMMC storage

Display and Video Support

- 1080p60 H.265 / H.264 VP9 / VP8 decode, 1080p60 H.265 / H.264 encode
- Dual-channel LVDS display
- HDMI 2.0a
- MIPI DSI
- Resistive/capacitive touch screen

Networking

- 2x10/100/1000Mbps ethernet
- Certified Wi-Fi 6 802.11 ax/ac/a/b/g/n and optional 802.15.4
- Bluetooth/BLE 5.4
- 2 x CAN-FD

High-speed Interfaces

- 1 x PCIe
- 2 x USB 3.0 OTG

Audio

- Headphone-out, line-in
- Digital microphone (stereo)
- Digital audio (SAI, SPDIF, RX TX, PDM 8CH)

Camera

- Dual MIPI CSI2 serial input
- Dual ISP (image sensor processor)

Other interfaces

- SD/MMC, UART, I2C, SPI, QSPI, PWM, GPIO, JTAG, timers

OS support

- Linux
- Android

Power

- Single 3.3V

Dimensions (W x L x H)

- 67.8 mm x 33 mm x 3.4 mm

-40 to 85°C industrial temperature support

Low-power consumption

- Optimized power consumption in both operational and suspend modes



Complementing the VAR-SOM-MX8M-PLUS

VAR-SOM-MX8M-PLUS Evaluation Kit

The VAR-DVK-VS8M-PLUS allows full performance and capability evaluation, serving as an evaluation, development, and production platform for hardware and software teams.

Evaluation Kit content


- Symphony-Board populated with VAR-SOM-MX8M-PLUS
- 7" LCD + capacitive touch panel
- Power supply and communication cables
- Documentation and design package
- WiFi/BT antenna



Symphony-Board

Supporting the VAR-SOM Pin2Pin Family and optimized for the VAR-SOM-MX8M-PLUS

The Symphony-Board ensures a scalable and simplified development and reference board to achieve a short time-to-market for customer's designs and end-products.

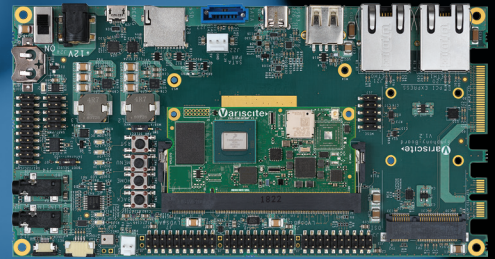

Display Support

- Dual LVDS display, DSI
- HDMI (extension board)

Touch panel

- Capacitive touch (6-pin FFC/FPC)
- Resistive touch (4-pin FFC/FPC)

Audio

- Headphone
- Line-in
- Digital mic

Storage

- SD/SDIO/MMC card socket

High Speed Interfaces

- USB 3.0/2.0 ports: 1x OTG (Type-C), 1x HOST
- 2 x 10/100/1000Mbps ethernet RJ45
- mPCIe

Camera (extension boards)

- Dual serial MIPI CSI

Additional Expansion Connectors

- SPI, SPDIF, GPIO
- UART, I2C, CAN-FD
- PWM
- SAI

Debug

- Micro USB

RTC backup battery

- CR1225 coin battery socket

Power

- 12V DC input

Size

- 16.9cm x 8.9cm

About Variscite

Variscite is a leading System on Modules (SoM) and Single-Board-Computer (SBC) design and manufacture company. A trusted provider of development and consulting services for a variety of embedded platforms, Variscite transforms clients' visions into successful products.

For more information contact:

sales@variscite.com

Copyright ©2023 Variscite. All rights reserved. Variscite Ltd. logos and product names are registered trademarks of Variscite Ltd. No part of this document may be reproduced by any means, nor translated to any electronic medium without the written consent of Variscite. Information contained in this document is believed to be accurate and reliable; however, Variscite assumes no responsibility for its use. Specifications are subject to change without notice.

