




VARISCITE LTD

VCAM-5640S-2ND Datasheet

i.MX8M-PLUS 2nd Camera Extension Board V 1.x

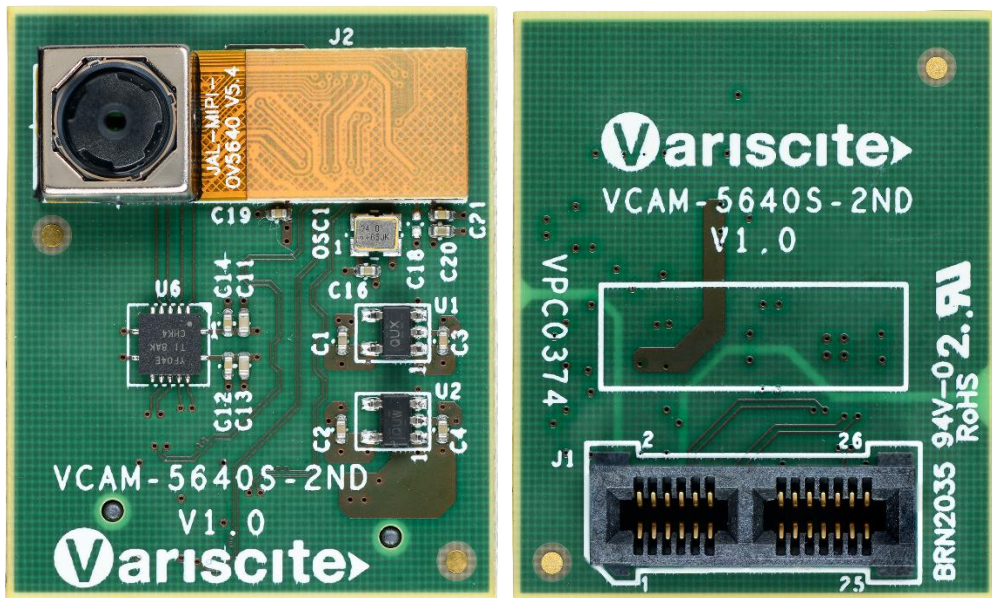

© 2020 Variscite Ltd.

All Rights Reserved. No part of this document may be photocopied, reproduced, stored in a retrieval system, or transmitted, in any form or by any means whether, electronic, mechanical, or otherwise without the prior written permission of Variscite Ltd.

No warranty of accuracy is given concerning the contents of the information contained in this publication. To the extent permitted by law no liability (including liability to any person by reason of negligence) will be accepted by Variscite Ltd., its subsidiaries or employees for any direct or indirect loss or damage caused by omissions from or inaccuracies in this document.

Variscite Ltd. reserves the right to change details in this publication without notice. Product and company names herein may be the trademarks of their respective owners.

Variscite Ltd.
4, Hamelacha Street
Lod
P.O.B 1121
Airport City, 70100
ISRAEL

Tel: +972 (9) 9562910
Fax: +972 (9) 9589477

Revision History

Revision	Date	Notes
1.00	Oct 20 2020	Preliminary

Table of Contents

Revision History	3
Table of Contents.....	4
List of Tables	5
1 Overview.....	6
1.1 General Information	6
1.1.1 VCAM-5640S-2ND Features:	6
1.1.2 Supporting Variscite Carrier Boards	6
1.1.3 Compatible Variscite SOM.....	6
1.1.4 Supporting O.S.....	6
1.1.5 Additional information	6
1.2 VCAM-5640S-2ND Features Summary	7
1.3 Block Diagram	7
1.4 Board Layout.....	8
1.5 VCAM-5640S-2ND Connectors	9
2 Detailed Description	10
2.1 Overview.....	10
2.2 VCAM-5640S-2ND Interfaces.....	11
2.2.1 Card Edge Connector	11
2.2.2 OV5640 V5.0 5 Mega Pixel Camera Module Connector.....	12
3 Environmental Specifications	14
4 Legal Notice	15
5 Warranty Terms.....	16
6 Contact Information	17

List of Tables

<i>Table 1-1 VCAM-5640S-2ND connectors</i>	9
<i>Table 2-1: Acronyms used on tables column header</i>	10
<i>Table 2-2: Card Edge connector pin out (J1)</i>	11
<i>Table 2-3: Camera Module mating connector pin out (J2)</i>	12
<i>Table 3-1: Environmental Specification</i>	14

1 Overview

This chapter gives an overview of the VCAM-5640S-2ND.

1.1 General Information

The VCAM-5640S-2ND is a serial camera extension board for the Variscite Symphony-Board & Concerto-Board. It allows evaluation and easy integration between an OV5640 camera module and the VAR-SOM-MX8M-PLUS 2nd MIPI-CSI2 interface exported from the SOM.

1.1.1 VCAM-5640S-2ND Features:

- 1 x 5 Mega Pixel Camera module, based on OV5640 sensor.

1.1.2 Supporting Variscite Carrier Boards

- Symphony-Board
- Concerto-Board

1.1.3 Compatible Variscite SOM

- VAR-SOM-MX8M-PLUS

1.1.4 Supporting O.S

- Android
- Linux


1.1.5 Additional Information

For further information contact Variscite support at support@variscite.com.

1.2 VCAM-5640S-2ND Features Summary


- 1 x 26 pin Card Edge Connector compatible with various carrier boards; see section Supporting Variscite Carrier Boards
- 1 x JAL-MIPI-OV5640 V5.0 camera module

1.3 Block Diagram

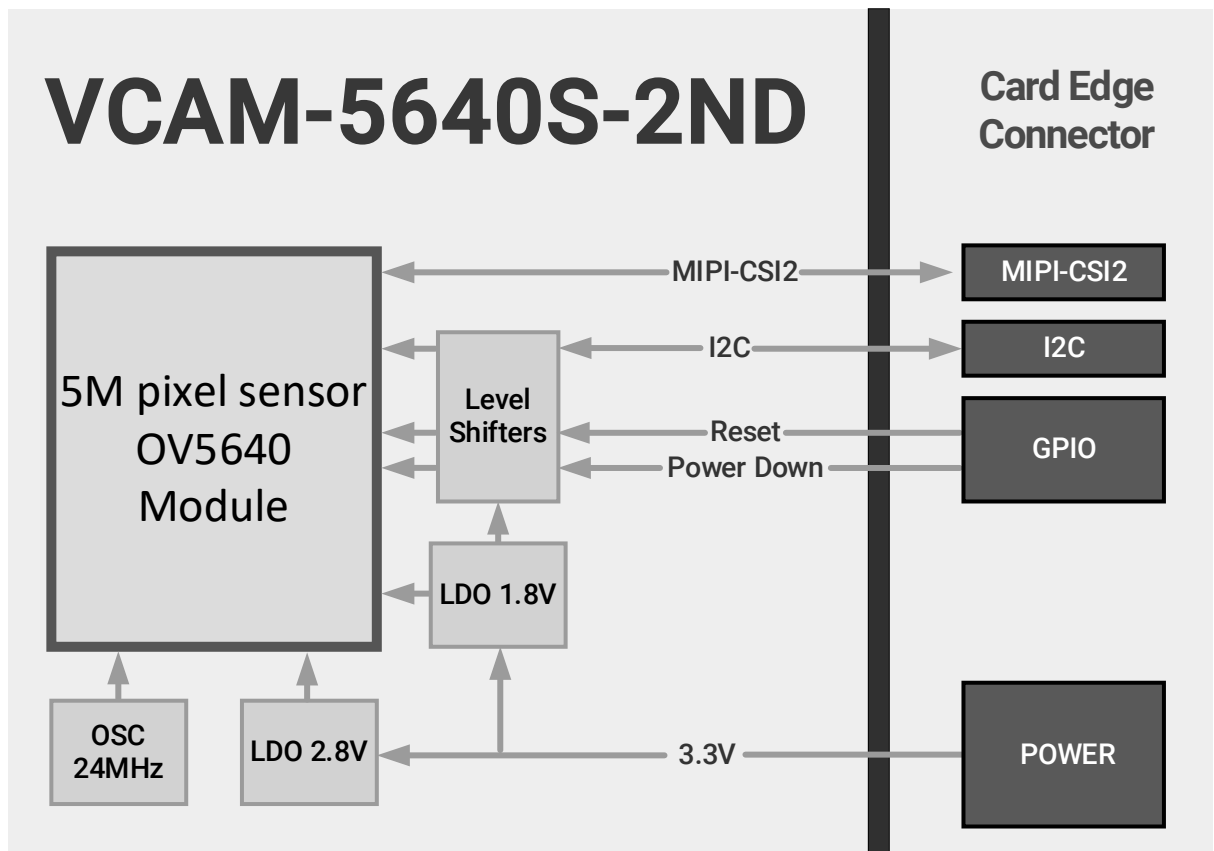

1.4 Board Layout

The VCAM-5640S-2ND physical dimensions are 27.96 x 34 mm.

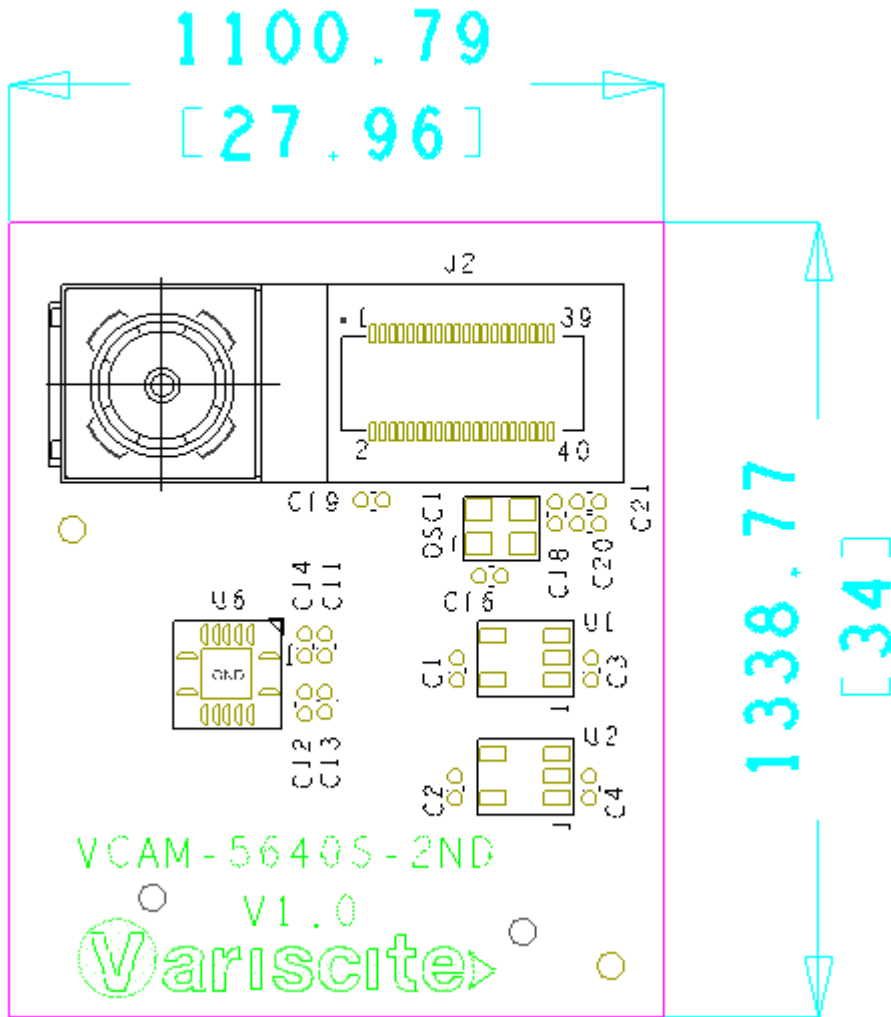

Detailed CAD files are available for download at www.variscite.com.

1.5 VCAM-5640S-2ND Connectors

The below table lists all available connectors on the VCAM-5640S-2ND, refer to chapter 2 for a more detailed description and Pin-out of each connector.

Table 1-1 VCAM-5640S-2ND connectors

Reference	Function	Type
J1	Symphony-Board and Concerto-Board edge connector mating	Card edge connector 0.8mm 26pins SAMTEC P/N: HSEC8-113-01-L-DV-A-K
J2	JAL-MIPI-OV5640 V5.0 camera module mating connector	Board to board, 40 pos., 0.4mm Hirose P/N: DF30FC-40DS-0.4V(82)

2 Detailed Description

2.1 Overview

This chapter details the VCAM-5640S-2ND features and external interfaces.

Please refer to the Compatible Variscite SOM section data sheets for more information.

Table 2-1 describes this chapter table header and acronyms used.

Table 2-1: Acronyms used on tables column header

Column		Meaning
Pin#	x	Pin number on a connector
Type		Pin type & direction
	I	INPUT
	O	OUTPUT
	DS	Differential Signal
	A	Analog
	P	Power
Signal		VCAM-5640S-2ND schematic signal name
Description		Short Pin functionality description

2.2 VCAM-5640S-2ND Interfaces

2.2.1 Card Edge Connector

The Supporting Variscite Carrier Boards export the Compatible Variscite SOM 2nd MIPI-CSI2 camera interface to a 26POS 0.8mm PCB Edge connector.

Mating connector is SAMTEC P/N: HSEC8-113-01-L-DV-A-K

Table 2-2: Card Edge connector pin out (J1)

Pin #	Connector Signal	Type	Description
1			
2	BASE_PER_3V3	P	Camera Power supply 3.3V
3	J1.48-{MX8MP}_GPIO4_IO27	O	Camera power down control; Active high
4	BASE_PER_3V3	P	Camera Power supply 3.3V
5			
6			
7	J1.173-{MX8MP}_GPIO1_IO09*/GPIO4_IO19	O	Camera Reset control; Active low
8	I2C5_SCL	O	Camera I2C Clock signal
9			
10	I2C5_SDA	IO	Camera I2C Data signal
11			
12			
13	GND	P	Digital Ground
14	GND	P	Digital Ground
15	J1.152-{MX8MP}_MIPI_CSI2_CLK_P	DSI	MIPI-CSI2 Clock; Positive
16	J1.155-{MX8MP}_MIPI_CSI2_D0_P	DSI	MIPI-CSI2 Lane0; Positive
17	J1.150-{MX8MP}_MIPI_CSI2_CLK_N	DSI	MIPI-CSI2 Clock; Negative
18	J1.157-{MX8MP}_MIPI_CSI2_D0_N	DSI	MIPI-CSI2 Lane0; Negative
19	GND	P	Digital Ground
20	GND	P	Digital Ground
21			
22	J1.146-{MX8MP}_MIPI_CSI2_D1_P	DSI	MIPI-CSI2 Lane1; Positive
23			
24	J1.148-{MX8MP}_MIPI_CSI2_D1_N	DSI	MIPI-CSI2 Lane1; Negative
25	GND	P	Digital Ground
26	GND	P	Digital Ground

2.2.2 OV5640 V5.0 5 Mega Pixel Camera Module Connector

The VCAM-5640S-2ND features a 5 Mega Pixel camera module based on OV5640 sensor. The mating connector is Hirose DF30FC-40DS-0.4V(82)

Table 2-3: Camera Module mating connector pin out (J2)

Pin #	Mating connector Signal	Type	Description
1	GND	P	Digital Ground
2	GND	P	Digital Ground
3			
4	VCC_2V8	P	Camera 2.8V Power supply
5	CAM_I2C_SDA	IO	I2C data <i>Note: Signal level is 1.8V</i>
6			
7	CAM_I2C_SCL	I	I2C clock <i>Note: Signal level is 1.8V</i>
8	VCC_2V8	P	Camera 2.8V Power supply
9	CAM_RESET	I	Camera Reset control; Active low <i>Note: Signal level is 1.8V</i>
10			
11			
12			
13			
14			
15			
16	J1.146-{MX8MP}_MIPI_CSI2_D1_P		Camera MIPI-CSI2 Lane 1; Positive
17	CAM_PWDN	I	Camera power down control; Active high <i>Note: Signal level is 1.8V</i>
18	J1.148-{MX8MP}_MIPI_CSI2_D1_N		Camera MIPI-CSI2 Lane 1; Negative
19			
20	GND	P	Digital Ground
21			
22	J1.152-{MX8MP}_MIPI_CSI2_CLK_P		Camera MIPI-CSI2 Clock; Positive
23			
24	J1.150-{MX8MP}_MIPI_CSI2_CLK_N		Camera MIPI-CSI2 Clock; Negative
25			
26	GND	P	Digital Ground
27			
28	J1.155-{MX8MP}_MIPI_CSI2_D0_P		Camera MIPI-CSI2 Lane 0; Positive

VCAM-5640S-2ND CAMERA ADAPTER BOARD

Pin #	Mating connector Signal	Type	Description
29			
30	J1.157-{MX8MP}_MIPI_CSI2_DO_N		Camera MIPI-CSI2 Lane 0; Negative
31			
32	GND	P	Digital Ground
33			
34	CAM_MCLK	I	Camera Reference clock <i>Note: Signal level is 1.8V</i>
35			
36	VCC_1V5	O	Camera internal LDO 1.5V output
37			
38	VCC_1V8	P	Camera 1.8V Power supply
39			
40	GND	P	Digital Ground

3 Environmental Specifications

Table 3-1: Environmental Specification

	Min	Max
Commercial operating temperature range	0°C	+70°C
MTBF	>10KHRS	
Relative humidity, Operational	10%	90%
Relative humidity, Storage	5%	95%

4 Legal Notice

Variscite LTD (“Variscite”) products and services are sold subject to Variscite’s terms and conditions of sale, delivery and payment supplied at the time of order acknowledgement.

Variscite warrants performance of its products to the specifications in effect at the date of shipment. Variscite reserves the right to make changes to its products and specifications or to discontinue any product or service without notice. Customers should therefore obtain the latest version of relevant information from Variscite to verify that the information is current.

Testing and other quality control techniques are utilized to the extent Variscite deems necessary to support its warranty.

Specific testing of all parameters of each device is not necessarily performed unless required by law or regulation.

In order to minimize risks associated with customer applications, the customer must use adequate design and operating safeguards to minimize inherent or procedural hazards. Variscite is not liable for applications assistance or customer product design. The customer is solely responsible for its selection and use of Variscite products. Variscite is not liable for such selection or use nor for use of any circuitry other than circuitry entirely embodied in a Variscite product.

Variscite products are not intended for use in life support systems, appliances, nuclear systems or systems where malfunction can reasonably be expected to result in personal injury, death or severe property or environmental damage. Any use of products by the customer for such purposes is at the customer’s own risk.

Variscite does not grant any license (express or implied) under any patent right, copyright, mask work right or other intellectual property right of Variscite covering or relating to any combination, machine, or process in which its products or services might be or are used. Any provision or publication of any third party’s products or services does not constitute Variscite’s approval, license, warranty or endorsement thereof. Any third-party trademarks contained in this document belong to the respective third-party owner.

Reproduction of information from Variscite datasheets is permissible only if reproduction is without alteration and is accompanied by all associated copyright, proprietary and other notices (including this notice) and conditions. Variscite is not liable for any un-authorized alteration of such information or for any reliance placed thereon.

Any representations made, warranties given, and/or liabilities accepted by any person which differ from those contained in this datasheet or in Variscite’s standard terms and conditions of sale, delivery and payment are made, given and/or accepted at that person’s own risk. Variscite is not liable for any such representations, warranties or liabilities or for any reliance placed thereon by any person.

5 Warranty Terms

Variscite guarantees hardware products against defects in workmanship and material for a period of one (1) year from the date of shipment. Your sole remedy and Variscite's sole liability shall be for Variscite, at its sole discretion, to either repair or replace the defective hardware product at no charge or to refund the purchase price. Shipment costs in both directions are the responsibility of the customer. This warranty is void if the hardware product has been altered or damaged by accident, misuse or abuse.

Disclaimer of Warranty

THIS WARRANTY IS MADE IN LIEU OF ANY OTHER WARRANTY, WHETHER EXPRESSED, OR IMPLIED, OF MERCHANTABILITY, FITNESS FOR A SPECIFIC PURPOSE, NON-INFRINGEMENT OR THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION, EXCEPT THE WARRANTY EXPRESSLY STATED HEREIN. THE REMEDIES SET FORTH HEREIN SHALL BE THE SOLE AND EXCLUSIVE REMEDIES OF ANY PURCHASER WITH RESPECT TO ANY DEFECTIVE PRODUCT.

Limitation on Liability

UNDER NO CIRCUMSTANCES SHALL VARISCITE BE LIABLE FOR ANY LOSS, DAMAGE OR EXPENSE SUFFERED OR INCURRED WITH RESPECT TO ANY DEFECTIVE PRODUCT. IN NO EVENT SHALL VARISCITE BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES THAT YOU MAY SUFFER DIRECTLY OR INDIRECTLY FROM USE OF ANY PRODUCT.

6 Contact Information

Headquarters

Variscite LTD
4, Hamelacha st.
Lod.
P.O.B 1121
Airport City, 70100
ISRAEL
Phone +972 (9) 9562910 • Fax +972 (9) 9589477

Tel: +972 (9) 9562910
Fax: +972 (9) 9589477

Sales: sales@variscite.com
Technical support: support@variscite.com
Website: www.variscite.com

